



Nylofor® Medium

A lightweight and easy to install medium security fence.

Product detail



FEATURES & BENEFITS

Trusted protection

Trusted in South Africa to demarcate and protect residential and commercial properties. Two horizontal wires in the panel's bend and 3.65mm wires (4.05mm when PVC coated) increases its rigidity and protection levels.

Easy installation

The 2.5m wide panels give flexibility when used on smaller installations or sites with many directional changes and corners.

Good visibility

Apertures of 50 x 100mm provide excellent visibility when used with surveillance systems, yet it is too narrow to provide a sturdy foothold which discourages climb-over attempts.


Tamper resistant fixing mechanisms

Expertly designed posts and superior fixing mechanisms maintain the complete installation's integrity and resist attempts to pry panels loose from the post.

Full system 10-year guarantee (standard terms & conditions apply)

Superior coatings underpin our 10-year anti-corrosion guarantee when the full system (panels, Bekafix Secure posts, and stainless steel fixators) is used.

Security level

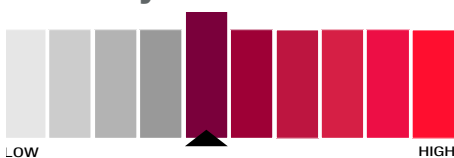

Applications




Functionalities

Panels



Nylofor Medium's unique feature of two horizontal wires in the reinforcing bends gives the panel extra strength and rigidity when compared to similar products available on the market.

Wire and Apertures



High-strength panels made from 3.65mm core wire, PVC coated to 4.05mm.

Apertures are 50 x 100mm.

Durable High-Quality Coatings



Highly durable Zincalu® Super and optional PVC coatings guarantee an extra-long lifespan and low maintenance, delivering extreme protection in even the harshest environments.

Available in Zincalu® Super only or with an additional PVC coating on panels in green RAL 6005 or anthracite RAL 7021.

Posts & Fixing Mechanisms



Bekafix® Secure posts are specifically designed and engineered to be used in combination with Betafence's panels. With Bekafix® Secure, the fence is safely tucked behind the lip of the post, withstanding attempts to pry the panel loose. The panels are secured to the post with specialised fixators, firmly bolted through the post using stainless steel security bolts and shear-off nuts that protect against tampering.

This combination of Betafence panels with Bekafix post and superior fixing mechanisms delivers a complete fencing system that ensures the installation's integrity and protection levels.

Additional Security Accessories

Extended posts and brackets are available to accommodate additional security features such as electric fencing*, flat wrap razor, or BTC coil topplings.

*Supplied and installed by third parties.

Gates

For comprehensive access control solutions that ensure a uniform level of security throughout your perimeter, inquire about our fit-for-purpose range of swing and sliding gates.

Quality Assurance

Our range of high-security products are locally manufactured in our South African ISO 9001:2015 quality certified facility.

NYLOFOR MEDIUM (SOUTH AFRICA)

Nominal fence height (mm)	Panel width (mm) (centre-centre between posts)	Number of reinforcing V bends / panel	Post length (mm)	Number of fixators / panel	Bolts, washers and shear-off nuts / post
1200	2515	2	1600	8	4
1800	2515	3	2400	8	4
2000	2515	4	2700	8	4

SOUTH AFRICA - WESTERN CAPE

Unit B10,
Bergriver Business Park,
Paarl, 7646, South Africa

TEL: +27 21 868 7300

SOUTH AFRICA - GAUTENG

Unit 3,
CDE Premium Park,
Johannesburg, 1685, South Africa

TEL: +27 11 314 8034

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand, Betafence is part of a global network, working alongside Guardiar and Hesco as a leader in perimeter security systems and solutions. For more information please visit praesidiad.com.



BETA FENCE
Securing What Matters

betafence.com/contact